


Part Number : ALC10S1105EX

Customer : DNM Design

Customer p/n :

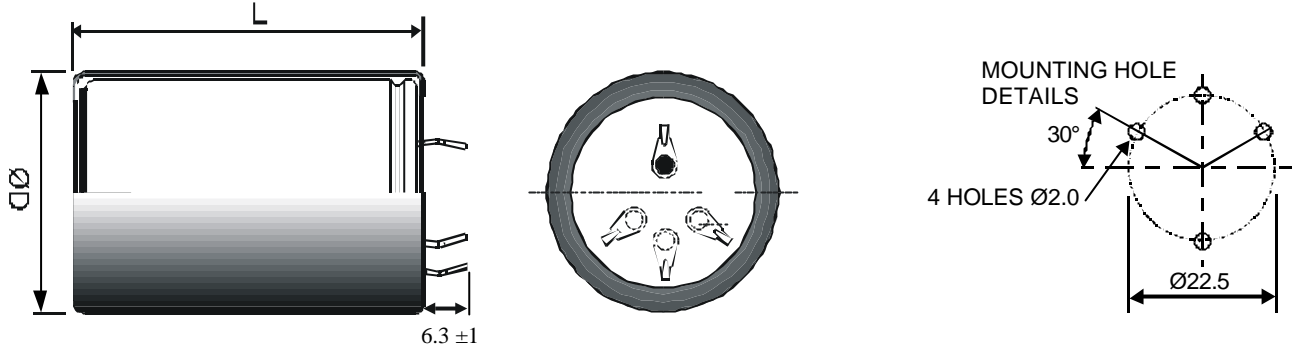

Diameter (mm)	40	-0/+1
Length (L or L2) (mm)	90	+/-2
Terminals	4 pin snap-in	
Other Dimensions		

Capacitance:	10000	µF
Lower Cap Tolerance:	20	%
Upper Cap Tolerance:	20	%
Working Voltage:	100	V DC
Surge Test Voltage:	115	V DC

ESR	44	m'Ohms MAX @ 100 HZ,20°C
IMPEDANCE	38	m'Ohms MAX @ 10 KHZ,20°C

DC LEAKAGE	6	mA max @ Test Volts
Test Voltage	100.0V	DC

Rated ripple current	8.24	A rms at	100 Hz and	85 °C
Temperature range	-40	°C to	85	°C

slit foil type

Approved _____ Date _____